



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 29/06	A2	(11) International Publication Number: WO 99/65204 (43) International Publication Date: 16 December 1999 (16.12.99)
--	-----------	---

(21) International Application Number: PCT/IB99/01026

(22) International Filing Date: 4 June 1999 (04.06.99)

(30) Priority Data:
09/093,213 8 June 1998 (08.06.98) US

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7,
Kista, S-164 85 Stockholm (SE).

(72) Inventor: SATO, Takashi; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL).


(74) Agent: FAESSEN, Louis, M., H.; Prof. Holstlaan 6, NL-5656
AA Eindhoven (NL).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: WIRELESS COUPLING OF STANDARDIZED NETWORKS AND NON-STANDARDIZED NODES

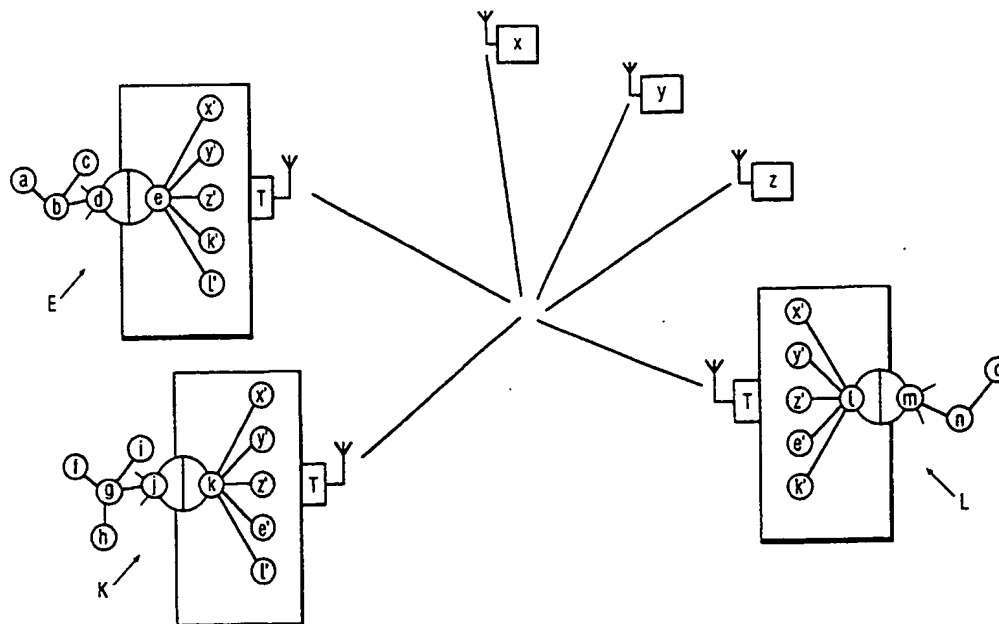**(57) Abstract**

A method and apparatus are provided for establishing wireless communications between multiple standardized information networks and non-standardized information devices. Communicating networks may operate in accordance with the same or different standards. For each network, virtual proxy nodes are formed which represent each of the other communicating networks and each of the non-standardized information devices.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

Wireless coupling of standardized networks and non-standardized nodes.

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to wireless coupling in information systems and, in particular, to wireless coupling of standardized information devices to both standardized and non-standardized information devices.

10

2. Description of Related Art

Wireless coupling of information devices has been described in a number of publications. For example, published PCT Application Number WO 97/29605 describes a wireless virtual Local Area Network (LAN) which enables workgroup membership to be redefined without physical wiring changes. This is particularly useful, for example, to facilitate communication between remotely-located LANs and to permit ad hoc networking between a group of portable computers.

15

Such known wireless coupling arrangements are very useful, but they are limited to the coupling of standardized information devices, i.e. information devices that are adapted to communicate with each other in accordance with a common standard. A typical example is a network of computers that are adapted for communication over a common information bus. There are also, however, many other applications where it is desirable to establish wireless communications between standardized information devices and non-standardized information devices, i.e. information devices that are not adapted to communicate in accordance with a common standard. Non-standardized information devices include both standard-capable information devices, such as computers that have not been adapted to communicate in accordance with commonly-used standard, and standard-incapable information devices which do not have sufficient intelligence to be so adapted. Examples of typical standard-incapable information devices with which wireless communications are of particular interest are security apparatus, audio and video equipment, telephone equipment etc. Although it is possible to provide each non-standardized information device in a system with sufficient hardware to enable it to communicate in accordance with a common standard, this is

25

30

an expensive and often impractical solution. It would require substantial modification of every non-standardized information device in the system.

U.S. Patent Application docket number PHA 23414, filed concurrently with the present application, which is hereby incorporated by reference, discloses a method and application for wireless coupling of standardized nodes and non-standardized nodes. It is also desirable, however, to effect wireless coupling of standardized networks to combinations of non-standardized nodes and other standardized networks.

SUMMARY OF THE INVENTION

It is an object of the invention to provide a method and apparatus for enabling economical wireless communication between standardized networks and combinations of non-standardized nodes and other standardized networks. As used herein:

- "node" means any device that is capable of producing, processing or utilizing information;
- "standardized node" means a node that is adapted for communicating with other nodes in accordance with a common standard;
- "standardized network" means at least one standardized node coupled to a bus for communication with other standardized nodes;
- "non-standardized node" means a node that is not adapted for communicating with other nodes in accordance with a common standard;
- "wireless communication" means communicating information via any energy propagation mode which is feasible for the information being communicated, including, for example, radio frequency (RF), infra-red (IR), and sonic energy propagation modes.

It is another object of the invention to provide such a method and apparatus which automatically adapts to the addition and removal of both standardized and non-standardized nodes from a wireless communication system.

It is yet another object of the invention to provide such a method and apparatus which facilitates wireless coupling of standardized networks operating in accordance with different standards.

In a method in accordance with the invention, wireless communication in a system including a plurality of standardized networks and at least one non-standardized node is achieved by, for each standardized network:

- establishing an associated virtual network including a respective virtual node representing each other standardized network and each non-standardized node;

- communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with the other standardized network;
- communicating information between each non-standardized node and the respective virtual node in a communication format/protocol compatible with the non-standardized node;
- communicating information between each virtual node and the associated standardized network in a communication format/protocol compatible with the associated standardized network.

In an apparatus in accordance with the invention, a wireless information system is formed which includes:

- at least one non-standardized node having a transceiver for wireless communication;
- a plurality of standardized networks, each including;
- a local bus for carrying communications between any standardized nodes that are connected to the bus;
- a local wireless station including a transceiver for wireless communication with the at least one non-standardized node;
- a local virtual network coupled to the local bus and to the local wireless station and including a controller and a memory for cooperatively:
- establishing in the memory a virtual node representing each other standardized network and each non-standardized node;
- communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with said other standardized network;
- communicating information between each said non-standardized node and the respective virtual node in a communication format/protocol compatible with said non-standardized node;
- communicating information between each said virtual node and the local standardized network in a communication format/protocol compatible with said local standardized network.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a schematic diagram illustrating an embodiment of an information system which communicates in accordance with the invention.

Figure 2 is a block diagram illustrating an embodiment of a portion of the information system of Figure 1.

DESCRIPTION OF THE PREFERRED EMBODIMENT

5 The information system of Figure 1 includes a plurality of non-standardized nodes x,y,z and subsystems E,K,L, each including a real network, a virtual network and a respective wireless station. More specifically:

- 10 • Subsystem E includes a real network having standardized nodes a,b,c and a real half bridge d, which is itself a standardized node; a virtual network having a virtual half bridge e and virtual proxy nodes x',y',z',k',l'; and a wireless station T.
- Subsystem K includes a real network having standardized nodes f,g,h,i and a real half bridge j, which is itself a standardized node; a virtual network having a virtual half bridge k and virtual proxy nodes x',y',z',e',l'; and a wireless station T.
- 15 • Subsystem L includes a real network having standardized nodes n,o and a real half bridge m, which is itself a standardized node; a virtual network having a virtual half bridge l and virtual proxy nodes x',y',z',e',k'; and a wireless station T.

Practical information systems of this type include, for example:

- 20 • an office computer system having standardized nodes including personal computers a,b,c wired for communication over a common information bus with each other and with the half bridge d;
- non-standardized nodes including a printer x, a hard-disc drive y, and an image scanner z;
- an entertainment and security system having standardized nodes including a digital TV f, a digital VCR g, a security camera h, and a digital stereo system I, wired for communication over a common information bus with each other and with the half bridge j; and
- 25 • portable computers n and o wired for communication over a common information bus with each other and with the half bridge m.

Each of the real half bridges d,j,m controllably passes information between the real network of which it is part and the respective virtual network. Depending on the design of each of these half bridges, it may also control the passage of information between the other
30 nodes in the respective real network.

The non-standardized nodes x,y,z each include, in addition to a particular type of information device, a transceiver for wireless communication with the wireless station T. Each of these nodes also includes at least minimal intelligence for locally coordinating information flow between the respective information device and transceiver. Depending on the

innate complexity of the particular information device, this minimal intelligence may take any one of a variety of forms, e.g. added logic hardware and/or software in an already-existing processor or microprocessor, a dedicated microprocessor, or dedicated logic hardware.

Each wireless station T includes a local transceiver for wireless communication with the transceivers of nodes x,y,z and a wireless link for coordinating information flow between this local transceiver and the respective local virtual network. Each wireless station and each of the non-standardized nodes x,y,z also includes a respective transducer for propagating the mode of energy chosen for wireless communication. In the exemplary embodiment shown in Figure 1, antennas are shown for propagating RF energy.

Each virtual network is a model that is formed with reference to the respective real half bridge, the non-standardized nodes, and the virtual half bridges in the other virtual networks. Specifically:

- In subsystem E, the virtual half bridge e is modeled to be complementary to the real half bridge d, such that half bridges d and e collectively form a standardized full bridge. The virtual proxy nodes x',y',z' are modeled to represent the respective non-standardized nodes x,y,z, but modified to communicate with virtual half bridge e in the same standard as the real nodes a,b,c communicate with the real half bridge d. The virtual proxy nodes k' and l' are modeled to represent the respective virtual nodes k and l, in respective subsystems K and L, and modified *if necessary* to communicate with virtual half bridge e. Such modification is necessary only if the real networks with which virtual nodes k and l communicate operate in accordance with a different standard than the real network of which node d is a part.
- In subsystem K, the virtual half bridge k is modeled to be complementary to the real half bridge j, such that half bridges j and k collectively form a standardized full bridge. The virtual proxy nodes x',y',z' are modeled to represent the respective non-standardized nodes x,y,z, but modified to communicate with virtual half bridge k in the same standard as the real nodes f,g,h,i communicate with the real half bridge j. The virtual proxy nodes e' and l' are modeled to represent the respective virtual nodes e and l, in respective subsystems E and L, and modified *if necessary* to communicate with virtual half bridge k. Such modification is necessary only if the real networks with which virtual nodes e and l communicate operate in accordance with a different standard than the real network of which node j is a part.
- In subsystem L, the virtual half bridge l is modeled to be complementary to the real half bridge m, such that half bridges m and l collectively form a standardized full bridge. The

virtual proxy nodes x',y',z' are modeled to represent the respective non-standardized nodes x,y,z, but modified to communicate with virtual half bridge l in the same standard as the real nodes n,o communicate with the real half bridge m. The virtual proxy nodes e' and k' are modeled to represent the respective virtual nodes e and k, in respective subsystems E and K, and modified *if necessary* to communicate with virtual half bridge l. Such modification is necessary only if the real networks with which virtual nodes e and k communicate operate in accordance with a different standard than the real network of which node m is a part.

Figure 2 illustrates an exemplary embodiment of a lower-level subsystem for forming the real half bridge, the virtual network and the wireless station in each of the subsystems E,K,L. This lower-level subsystem includes a bridge-interface unit 20, a virtual intelligence unit 30, and the wireless station T mentioned in conjunction with the description of Figure 1.

The wireless station T includes a transceiver 12 and a wireless link 14. The transceiver is a conventional device, with the type of transceiver depending on the mode of propagation chosen for wireless communication. The wireless link 14 is also a conventional device for performing the functions of:

- transferring to the virtual intelligence unit 30 signals received by the transceiver 12 from the other virtual networks in the system;
- transferring to the transceiver 12 signals received from the virtual intelligence unit 30 for transmission to the other virtual networks in the system;
- converting signals received from the non-standardized nodes x,y,z, via the transceiver 12, to a format compatible with the virtual intelligence unit 30;
- converting signals received from the virtual intelligence unit to a format compatible with the transceiver and the non-standardized nodes; and
- exchanging timing and control signals with the virtual intelligence unit to effect arbitration, i.e. to coordinate the transfer of information to and from the non-standardized nodes.

The wireless link may be implemented by using, for example, a microprocessor and software for performing the format conversions. Alternatively, if the formats chosen for communication with the non-standard nodes are not so complex as to require extensive hardware, the wireless link may be constructed by using logic circuitry. See, for example, the wireless link described in PCT Application WO 88/07794, published on 6 October 1988.

The virtual intelligence unit 30 includes a controller 32, a program memory 34 and a data memory 36. The controller, which is coupled to the wireless station T and to the bridge-interface unit 20 via a bus, may be e.g. a microprocessor, a micro-controller or a digital signal processor. The controller, under the direction of instructions in the program memory, has the capability of cooperating with the wireless station T to:

- detect the existence of other virtual nodes and any non-standardized nodes that are currently capable of wireless communication with the transceiver 12;
- form virtual proxy nodes (e.g. the nodes x', y', z', k', l' in the virtual network of subsystem E) representing the detected nodes by storing in the data memory a description of each detected node and data which is either received from, or to be transmitted to, the node;
- coordinating with the wireless station to exchange communications between the virtual proxy nodes (e.g. x', y', z', k', l') and the real and virtual nodes that they represent (x, y, z, k, l).

Note that a variety of information may be stored in the program and data memories in association with the virtual proxy nodes, including, for example:

- formatting information unique to each of the non-standardized nodes represented by the proxy nodes;
- formatting information for facilitating communication with any standardized nodes represented by the proxy nodes (e.g. k', l') which operate in accordance with a different standard than that of the real half bridge (e.g. d) to which the respective virtual network is connected;
- algorithms for performing operations on data received from, or to be transmitted to, any of the nodes represented by the proxy nodes;
- relative priorities for communications with the respective nodes represented by the proxy nodes.

Note, further, that the virtual intelligence unit is easily adapted to changes in the types of non-standardized and standardized nodes with which each virtual network is to communicate. Information, e.g. program instructions and descriptive data, needed for communicating with new types of non-standardized nodes, and with standardized nodes that operate in accordance with a different standard, can be easily added to the program and data memories of the virtual intelligence unit.

The bridge-interface unit 20 and the virtual intelligence unit 30 cooperatively form the bridge comprising the real half bridge and the virtual half bridge in each of the subsystems E, K, L. Each real half bridge (e.g. node d in subsystem E) must communicate with the respective standardized nodes to which it is connected (e.g. a, b, c) in accordance with their

common standard. Each virtual half bridge (e.g. node e in subsystem E) must be capable of universally communicating with all virtual proxy nodes (e.g. x',y',z',k',l') in their respective formats. The half bridges may communicate with each other in any format common to each.

In the exemplary embodiment shown in Figure 2, the standard chosen for all of the real networks (i.e. the networks having the nodes a,b,c,d; the nodes f,g,h,i,j; and the nodes m,n,o) is the IEEE 1394 Standard. This standard is described in detail in the publication IEEE Std 1394-1995, "IEEE Standard for a High Performance Serial Bus" (30 August 1996), which is hereby incorporated by reference. This is a particularly useful standard for high performance bus interconnection of computer peripherals and consumer electronics, including the transmission of high-speed digital video data.

In each of the subsystems (E,K,L) part of the real half bridge (d,j,m) is formed by the respective bridge-interface unit 20, which includes a 1394-Standard physical layer 22 and a 1394-Standard link layer 24. Both of these layers are functional logic elements which are described collectively in IEEE Std 1394-1995 and in the IEEE publication P1394.1 Draft 0.03, "P1394.1 Draft Standard for High Performance Serial Bus Bridges" (18 October 1997), which is hereby incorporated by reference. The physical layer 22 includes exemplary ports 1,2,3 for physical connection to a common bus on which 1394-Standard nodes, e.g. the nodes h,p,q, communicate; ensures that only one node at a time transmits information on the common bus by providing an arbitration service; and converts communications received from the link layer 24 to the 1394 Standard. The link layer formats communications received from the physical layer into a standardized datagram which is addressed and framed for transmission to a predetermined one of the nodes currently in communication with the wireless station T and represented by the proxy nodes (e.g. x',y',z',k',l' in subsystem E).

In each of the subsystems (E,K,L) the virtual intelligence unit 30 forms the remainder of the real half bridge (d,j,m) and forms the virtual half bridge (e,k,l). More specifically, the controller 32, together with the program memory 34 and the data memory 36, forms:

- a common 1394.1-Standard switching fabric (internal fabric) coupling the real and virtual half bridges (de,jk,ml); and
- the remainder of the virtual half bridge (e,k,l) with links to the current virtual proxy nodes in the respective virtual network.

CLAIMS:

1. A method of wireless communication in a system including a plurality of standardized networks (a,b,c,d) (f,g,h,i,j) (m,n,o) and at least one non-standardized node (x,y,z), said method comprising, for each standardized network:
- 5 a. establishing an associated virtual network including a respective virtual node (x',y',z',k',l') (x',y',z',e',l') (x',y',z',e',k') representing each other standardized network and each non-standardized node;
 - b. communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with said other standardized network;
 - 10 c. communicating information between each said non-standardized node and the respective virtual node in a communication format/protocol compatible with said non-standardized node;
 - d. communicating information between each said virtual node and the associated standardized network in a communication format/protocol compatible with said associated standardized network.
 - 15
2. A method as in claim 1 where each of the standardized networks comprises a real half bridge (d)(j)(m) for communicating with standardized nodes in the respective network and where the virtual network includes a virtual half bridge (e)(k)(l) for
- 20 communicating with the real half bridge and with the virtual nodes in said communication format/protocol.
3. A method of wireless communication in a system including a first standardized network (a,b,c,d), at least one other standardized network (f,g,h,i,j), (m,n,o), and at least one
- 25 non-standardized node (x,y,z), said method comprising:
- a. determining the identity of each other standardized network and of each non-standardized node and selecting a communication format/protocol compatible with each said other standardized network and with each said non-standardized node;

- b. establishing a virtual node (x',y',z',k',l') representing each other standardized network and each non-standardized node;
 - c. communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with said other standardized network;
 - d. communicating information between each said non-standardized node and the respective virtual node in a communication format/protocol compatible with said non-standardized node;
 - e. communicating information between each said virtual node and the first standardized network in a communication format/protocol compatible with said first standardized network.
- 4. A wireless information system including:
 - a. at least one non-standardized node (x,y,z) having a transceiver for wireless communication;
 - b. a plurality of standardized networks (a, b, c, d), (f, g, h, i,j)(m, n, o), each including:
 - i. a local bus for carrying communications between any standardized nodes (a,b,c,d,f,g,h,i,j,m,n,o) that are connected to the bus;
 - ii. a local wireless station (T) including a transceiver (12) for wireless communication with the at least one non-standardized node (x,y,z);
 - iii. a local virtual network coupled to the local bus and to the local wireless station and including a controller (32) and a memory (34,36) for cooperatively:
 - (1) establishing in the memory a virtual node (x',y',z',k',l') (x',y',z',e',l') (x',y',z',e',k') representing each other standardized network and each non-standardized node;
 - (2) communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with said other standardized network;
 - (3) communicating information between each said non-standardized node and the respective virtual node in a

communication format/protocol compatible with said non-standardized node;

- (4) communicating information between each said virtual node and the local standardized network in a communication format/protocol compatible with said local standardized network.

5

5. A communication node for use in the wireless information system as claimed in claim 4; the communication node being part of a standardised network (a, b, c, d) which includes a local bus for carrying communication between any standardized nodes (a, b, c, d) that are connected to the bus;

10

the communication node including:

- a. a local wireless station (T) including a transceiver (12) for wireless communication with at least one non-standardized node (x,y,z) in the system;
- 15 b. a local virtual network coupled to the local bus and to the local wireless station (T) and including a controller (32) and a memory (34,36) for cooperatively:
- (1) establishing in the memory a virtual node (x',y',z',k',l') representing each other standardized network (f, g, h,i,j), (m, n, o) and each non-standardized node (x, y, z) in the system;
- 20 (2) communicating information between each other standardized network and the respective virtual node in a communication format/protocol compatible with said other standardized network;
- (3) communicating information between each said non-standardized node and the respective virtual node in a communication format/protocol compatible with said non-standardized node;
- 25 (4) communicating information between each said virtual node and the local standardized network in a communication format/protocol compatible with said local standardized network.

15

20

25

1/2

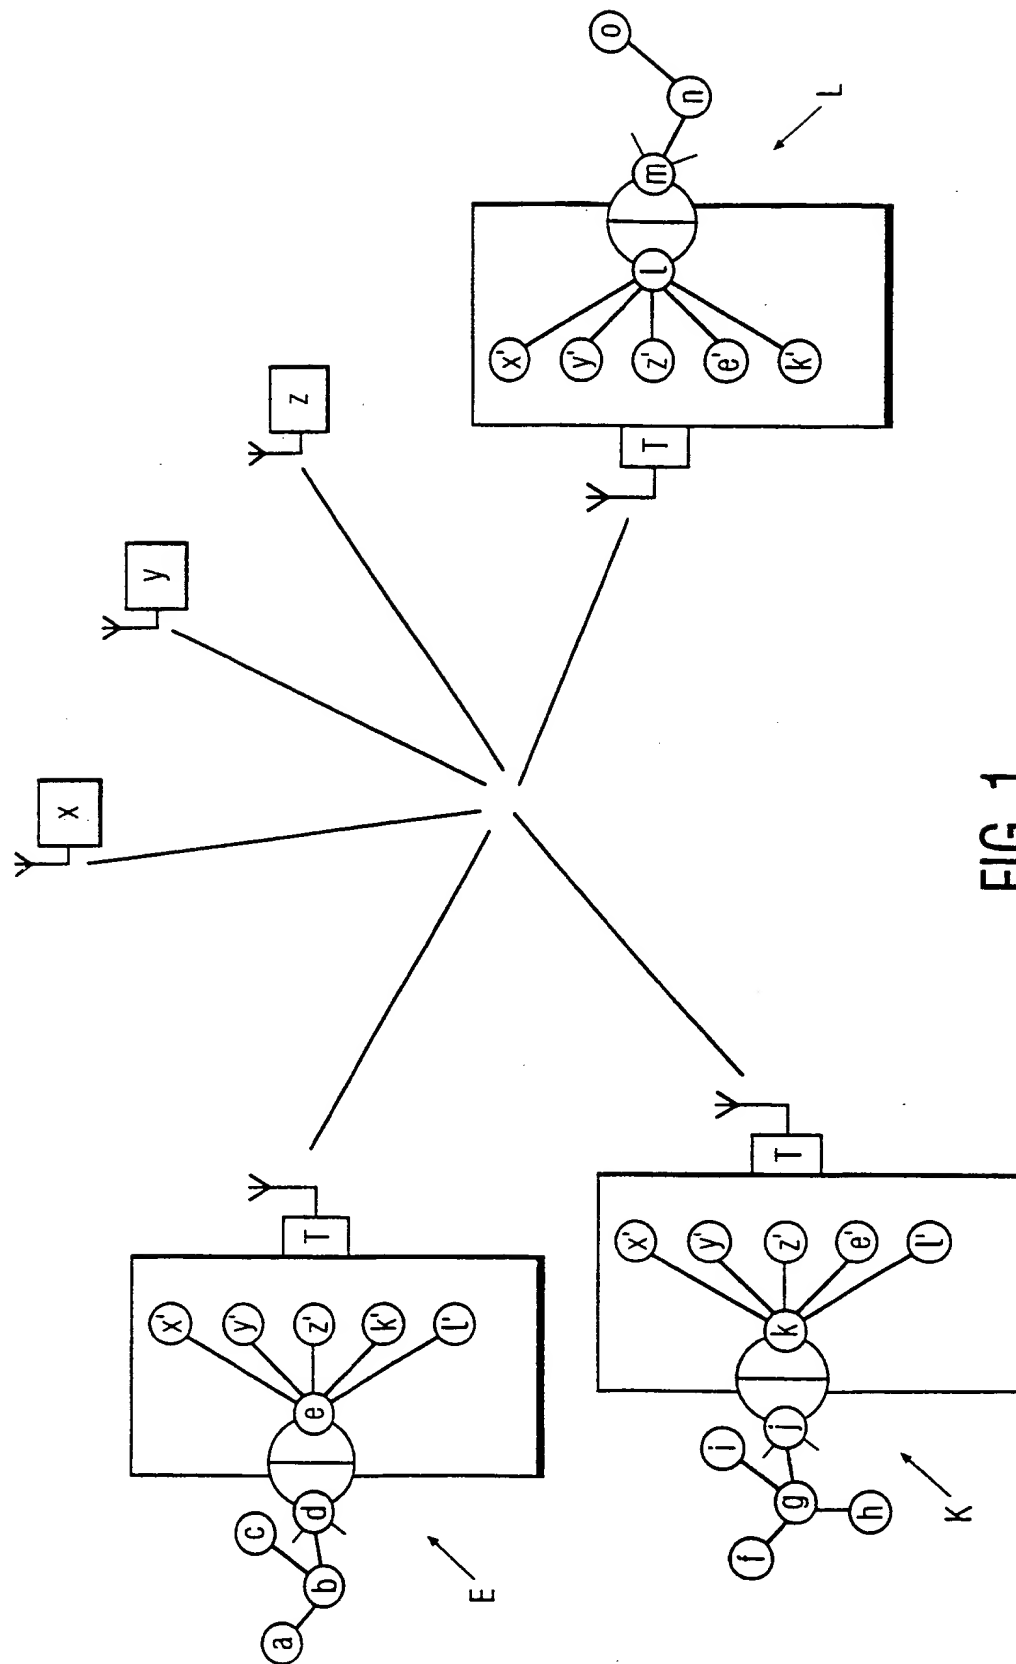


FIG. 1

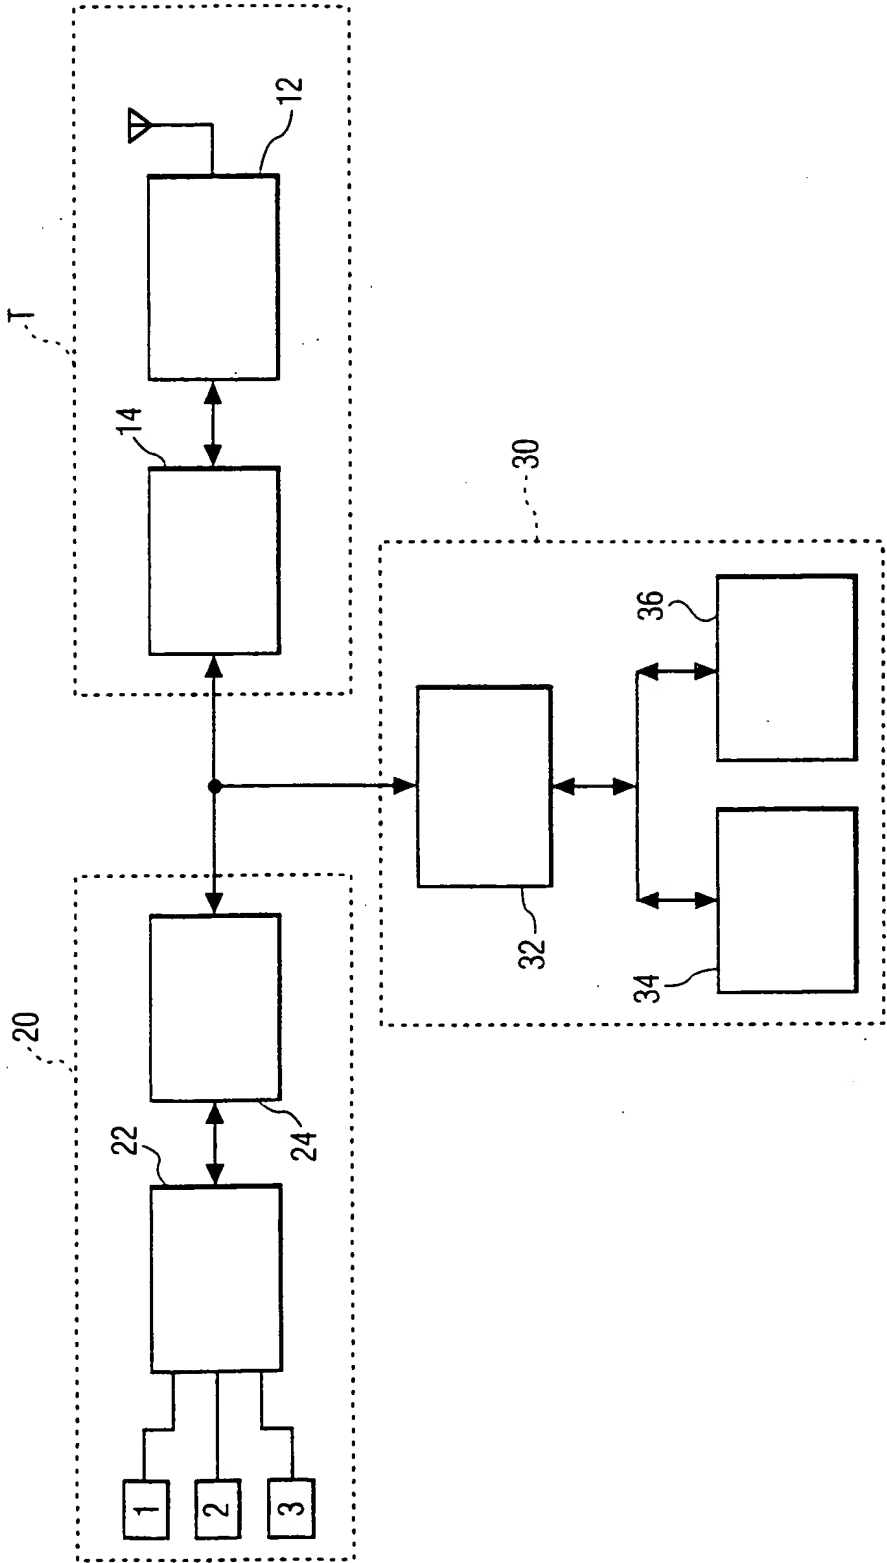


FIG. 2

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H04L 29/06, 12/28, 12/66</p>	<p>A3</p>	<p>(11) International Publication Number: WO 99/65204</p> <p>(43) International Publication Date: 16 December 1999 (16.12.99)</p>
<p>(21) International Application Number: PCT/IB99/01026</p> <p>(22) International Filing Date: 4 June 1999 (04.06.99)</p> <p>(30) Priority Data: 09/093,213 8 June 1998 (08.06.98) US</p> <p>(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).</p> <p>(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).</p> <p>(72) Inventor: SATO, Takashi; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).</p> <p>(74) Agent: FAESSEN, Louis, M., H.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p> <p>(88) Date of publication of the international search report: 30 March 2000 (30.03.00)</p>
<p>(54) Title: WIRELESS COUPLING OF STANDARDIZED NETWORKS AND NON-STANDARDIZED NODES</p> <div data-bbox="373 1134 1364 1764"> </div> <p>(57) Abstract</p> <p>A method and apparatus are provided for establishing wireless communications between multiple standardized information networks and non-standardized information devices. Communicating networks may operate in accordance with the same or different standards. For each network, virtual proxy nodes are formed which represent each of the other communicating networks and each of the non-standardized information devices.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB 99/01026

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 29/06, H04L 12/28, H04L 12/66
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9512942 A1 (NORAND CORPORATION), 11 May 1995 (11.05.95), page 9, line 1 - line 16; page 12, line 29 - page 13, line 19 --	1-5
A	US 5502726 A (MICHAEL FISCHER), 26 March 1996 (26.03.96), column 1, line 31 - column 2, line 63; column 12, line 58 - column 13, line 8 --	1-5
A	EP 0549235 A1 (NCR INTERNATIONAL INC.), 30 June 1993 (30.06.93), column 2, line 25 - column 3, line 24 -- -----	1-5-

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 January 2000

Date of mailing of the international search report

03-02-2000

Name and mailing address of the ISA:
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Ayoub Nabil/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/IB 99/01026

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9512942 A1	11/05/95	AU 679593 B AU 1089595 A CA 2175700 A EP 0740873 A US 5748619 A	03/07/97 23/05/95 11/05/95 06/11/96 05/05/98
US 5502726 A	26/03/96	AU 3590893 A EP 0578812 A JP 6506581 T WO 9315572 A	01/09/93 19/01/94 21/07/94 05/08/93
EP 0549235 A1	30/06/93	DE 69224805 D,T JP 5268224 A US 5519834 A	19/11/98 15/10/93 21/05/96